



1.1

1.1.1

--	--

--	--

--	--



1.1.2


	
☐	
☐	
☐	

	
☐	
☐	
☐	


	
☐	

	
☐	

2.2.2

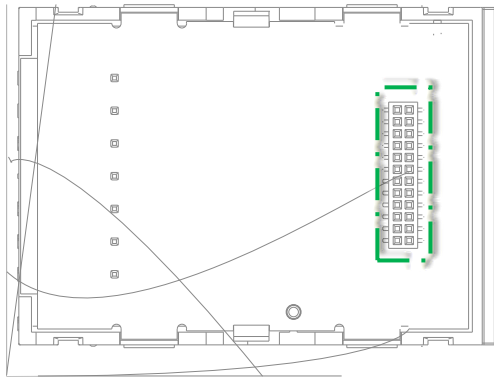

2.2.3



2.2.4

2.3



3.1

3.2


3.3









4.1



4.1.1

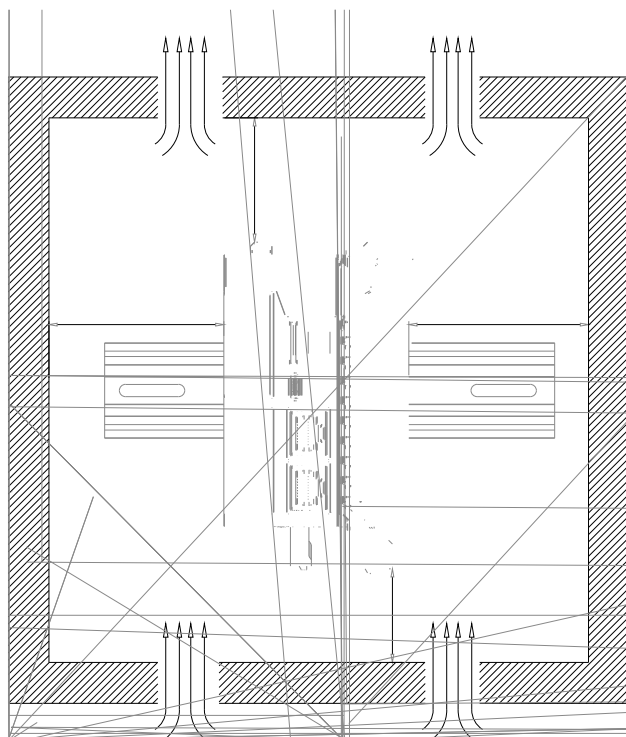



4.1.2

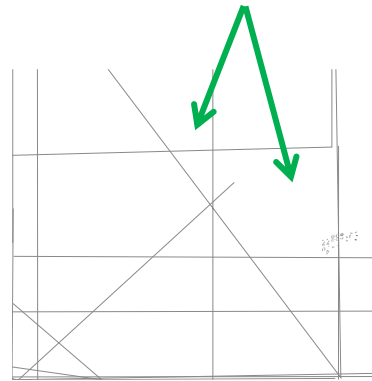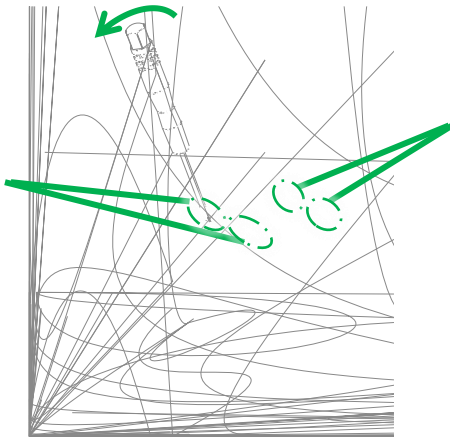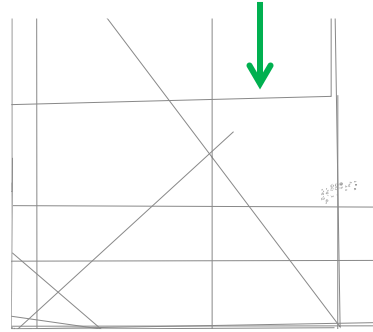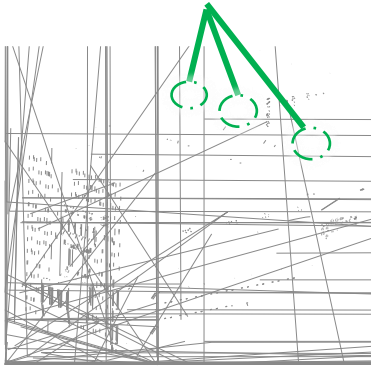

4.1.3



4.1.4

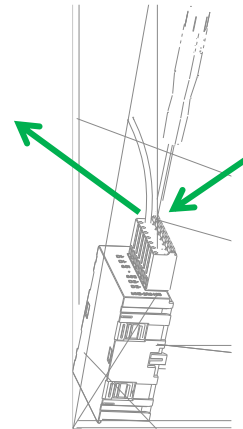
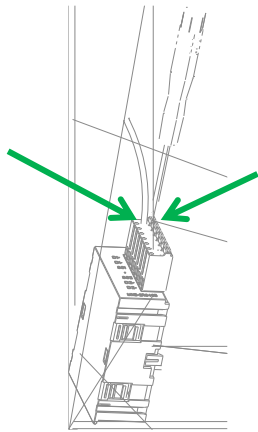


4.2


4.2.1

[illegible]

4.2.2

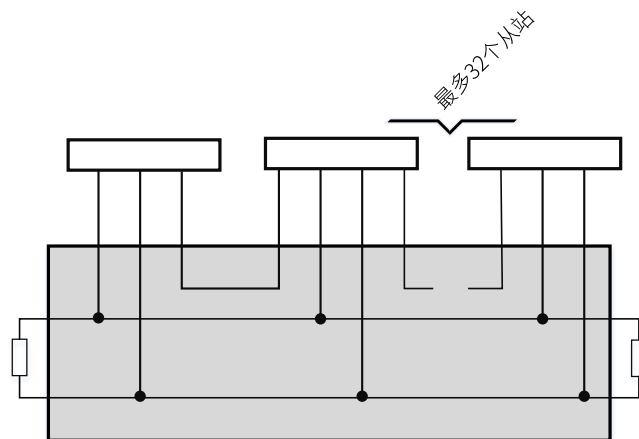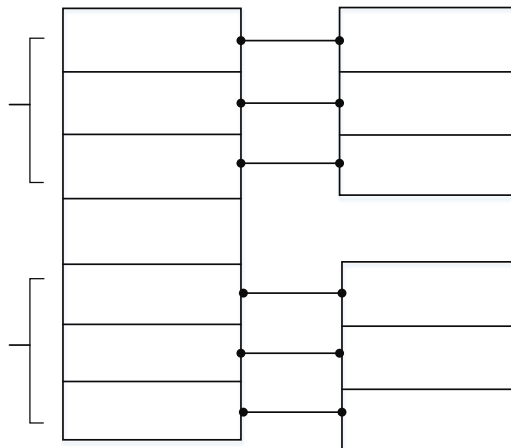

➤

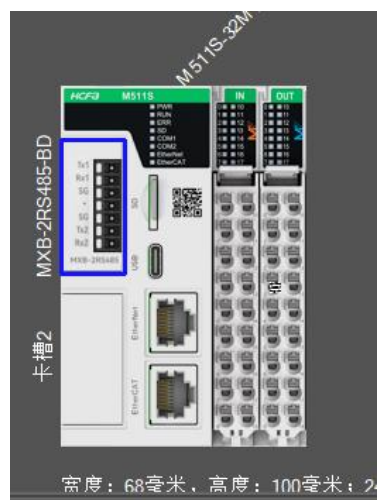

COM11 (RS485)		COM12 (RS485)	
站号:	1	站号:	1
波特率:	9600bps	波特率:	9600bps
协议:	(7, E, 1) ASCII	协议:	(7, E, 1) ASCII
主从模式:	从站	主从模式:	从站

站模式后, 您可以到工

注: 延迟时间是指COM口在任一次数据发送之前的等待时间; 当设置COM为主站时, 延迟时间应设置为0ms; 当设置COM为从站时, 延迟时间应设置为10ms。



>

